
★ BAILIFF ENTERPRISES, INC. ★

FIBERGLASS CAGED LADDERS

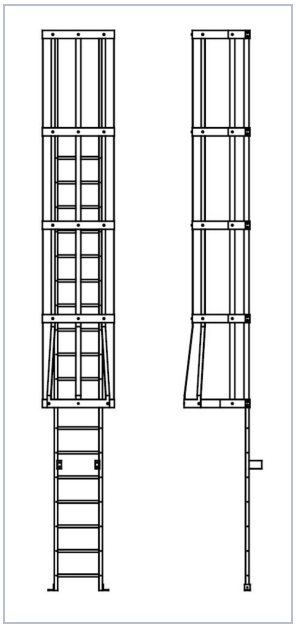

We can supply fiberglass OSHA approved ladders for your tank. Caged ladders offer extra fall protection versus regular straight ladders. The height of the ladder is the key to determining whether a cage or fall arrest device is required.

When a cage is used, it will start between 7 and 8 feet above ground.

Recently, OSHA has recommended using straight ladders with fall arrest devices rather than caged ladders.

Our standard ladders are 28" wide. Our ladders are constructed with 2" x 1/4" FRP square tube side rails and with 1 1/4" diameter x 3/16" thick FRP fluted rungs. FRP materials are made with IFR polyester resin, yellow in color.

BAILIFF ENTERPRISES, INC. ◆ 305 E. Rogers Road ◆ Willis, TX 77378
Contact Dan Miller ◆ 936-228-1520 ◆ dmiller@plasticstoragetanks.com